


MONUMENT RECORD

Corner ID: **Per_G25**

South 1/4 Corner



Section 32- T08N-R01W, 2nd P.M.

Perry Township, Monroe County, Indiana



MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)
0.7' x 0.3' limestone with no markings found flush

MONUMENT LOCATION SKETCH:

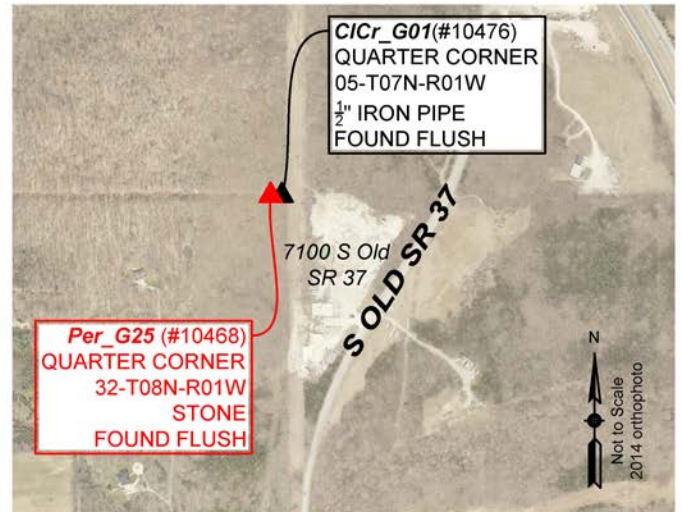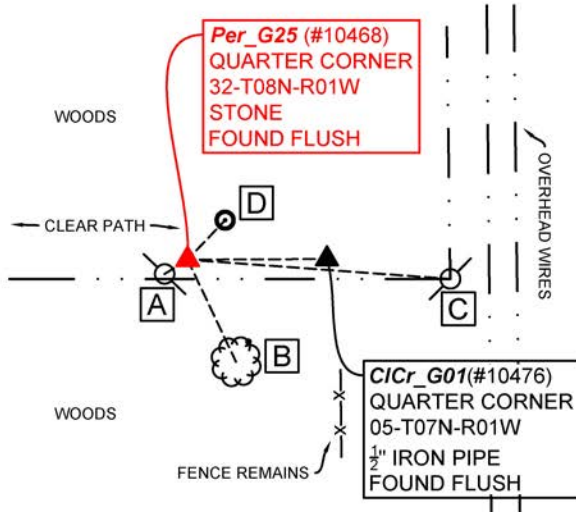

WITNESS MONUMENT TIES

All ties to new Bearing Trees (BTs) are a mag nail set in a 1-1/2" plastic washer stamped "SURVEY MARKER - DO NOT REMOVE" and hack mark at the root crown (less than 12" above ground) perpendicular to the center of the tree, unless otherwise noted. BT diameters are noted as dbh and are measured approximately 4.5' above ground. Bearings are measured from the monument to the center of the BT, distances are measured from the monument to the mag nail.

ID	BEARING	DISTANCE	DESCRIPTION
Witness A	S 58d W	11.3'	Mag nail and flagging found 1.2' above grade in the east side of a 9" power pole "175-034"
Witness B	S 25d E	47.1'	Mag nail and washer set in hack 0.5' above grade in the northeast side of a 13" white oak
Witness C	S 86d E	109.6'	Mag nail and flagging found 1.2' above grade in the west side of a Cinergy utility pole "115-033"
Witness D	N 43d E	22.7'	8" x 8" cut limestone found flush. Broken, no disk, with a brass plug in the top
(#10476)	N 89d44'22" E	58.03'	1/2" iron pipe found flush at CICr_G01, north 1/4 corner of section 5 in Clear Creek township.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **Per_G25**

South 1/4 Corner

Section 32- T08N-R01W, 2nd P.M.

Perry Township, Monroe County, Indiana




PHOTO IDENTIFIED: Photo Date: 4/30/2018



Photo Orientation & Description: Looking south at Per_G25



Photo Orientation & Description: Looking east at Per_G25



Photo Orientation & Description: Looking west at Per_G25



Photo Orientation & Description: Looking north at Per_G25

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND: Include, search area or areas, search procedure, etc.

Date of Field work/Search: 4/30/2018 By: RSO & CAR Monument Found: Stone BTs or Reference Objects Found: Witnesses B-D found per current MCS tie sheet Project #: CIGr_2018 Field Book: 52/2 Equipment: The basis of bearings is Grid North System NAD83(2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b_conus.db3, US Survey Feet, derived from GPS observations utilizing a Javad Triumph LS Rover and a Javad Triumph 2 Base. Static observations were post-processed using the JAVAD GNSS Data Online Processing Service (DPOS). Coordinate data was collected with a Javad Triumph LS Rover or radially with a conventional total station (Sokkia Set 510) from points established by GPS. Distances to witness ties were collected with a Leica Disto laser distance meter. Bearings to witness ties were collected with the internal magnetic compass of the Javad Triumph LS and were automatically adjusted to grid north and are approximately shown hereon for reference. Priority should be given to provide distances over bearings. Notes: Witness D offset was found on its side to the north of the monument. Looked for the offset to the east but could not locate.

OTHER EVIDENCE: Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.

The monument(s) are located northwest of the quarry at 7100 S Old SR 37. It is in the clear pathway where the powerlines run north, south, and west.

MONUMENT PRESERVATION: Describe work done to preserve existing monument.

Took new ties. A t-post was set 0.35' south of the monument 2.7' above grade facing north.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 2 of 3


MONUMENT RECORD

Corner ID: **Per_G25**

South 1/4 Corner

Section 32- T08N-R01W, 2nd P.M.

Perry Township, Monroe County, Indiana



THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*
A 3" x 10" limestone was previously witnessed by the State Highway Survey Location Team and Recovery Tie prepared on December, 1987. The 1987 Recovery Tie accepted the 3" x 10" limestone. The 3" x 10" limestone was previously witnessed and Recovery Tie Drawing prepared under the direction of the Monroe County Surveyor, Steven V. Farkas, on December, 1987. The 1987 Recovery Tie Drawing accepted the 3" x 10" limestone.

CERTIFICATIONS:



Date:10/26/2020
Trohn Enright-Randolph
Monroe County Surveyor



Date:10/22/2020
Accepted by the Monroe
County Surveyor Review
Board



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 3 of 3


STATE OF INDIANA - COUNTY OF MONROE

SECTION 32, TOWNSHIP 8 N, RANGE 1 W

MONUMENT DESCRIPTION & REMARKS

FOUND 3" x 10" LIMESTONE

RECOVERY TIE DRAWING

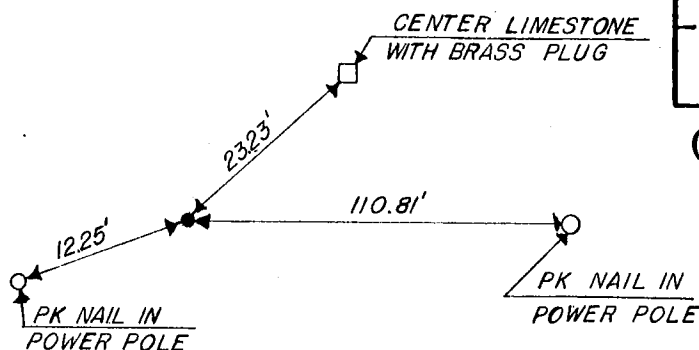

(●) AT CORNER



NOT TO SCALE

STATE OF INDIANA

COUNTY OF MONROE

I, EDMUND O. FARKAS HEREBY CERTIFY THAT THIS DOCUMENT WAS PREPARED UNDER MY DIRECTION IN ACCORDANCE WITH THE PROVISIONS OF SECTION 17-3-64-4 - 17-3-64-8 OF THE INDIANA CODE, BEING ACTS OF 1965, CHAPTER 319, AND THE ABOVE DATA IS GIVEN UNDER MY HAND AND SEAL THIS DAY OF DECEMBER, 19 87 A.D.

SPACE
RESERVED
FOR
RECORDING
OFFICER.

INDIANA REGISTERED LAND SURVEYOR NO. OR

UNITED STATES GOVERNMENT AGENCY


TITLE

TOWNSHIP:
PERRY

CORNER I.D.


CORNER ID # G-25

SEC. 32 T-8-N R-1-W
PERRY TWP.
MONROE CO.



Type Monument 3"x10" LIMESTN. (FND)
Depth 2" BELOW GRD.
By S.P.#3
Date DEC. 1987

State Form 40180

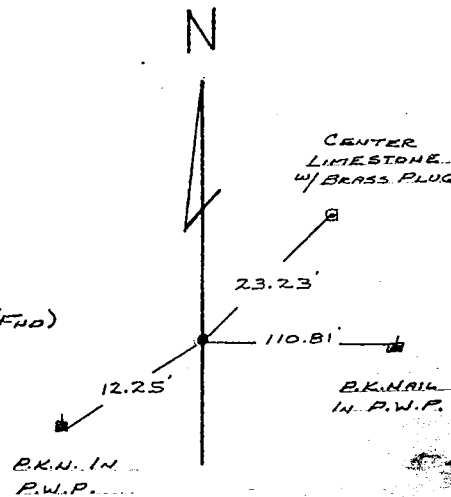

Recovery Tie Submitted by: State Highway Survey Location Team